


ZERO OHM RESISTOR 零歐姆電阻器

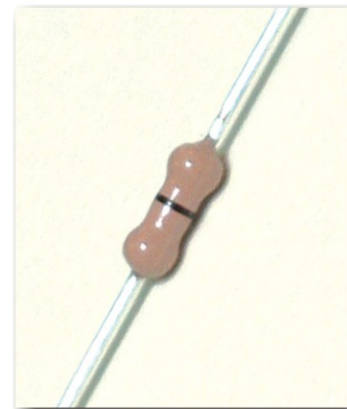


ZO

12.5
25
50

- ONE BLACK BAND DENOTES 0 OHM VALUE.
黑色色環表示零歐姆阻值。

DIMENSIONS 尺寸

Unit: mm




TYPE 型號	MEASUREMENT 外型尺寸			
	L	D	H	d
ZO12.5(ZO25S)	3.5 ± 0.5	1.7 ± 0.5	21 ± 1.0	0.38 ± 0.05
ZO25(ZO50S)	6.0 ± 1.0	2.3 ± 0.5	20 ± 1.0	0.38 ± 0.05
ZO50(ZO100S)	9.0 ± 1.0	3.0 ± 0.5	25 ± 1.0	0.48 ± 0.05

JUMPER WIRE 跳綫

JW


45
52
60
78

- RESISTANCE VALUE LESS THAN 0.05 OHM.
阻值低於0.05 OHM

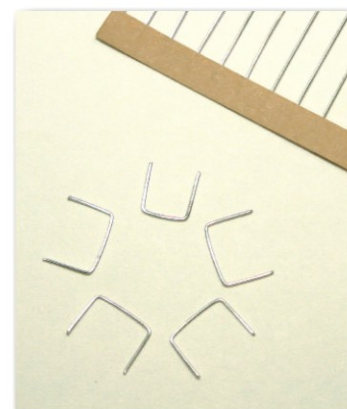

DIMENSIONS 尺寸

Unit: mm

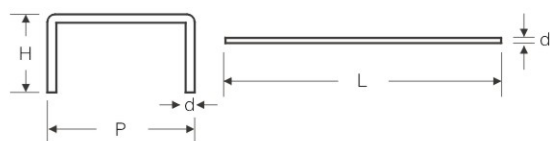

TYPE 型號	L	d	H	P
JW45	5-60 ± 1	0.45 ± 0.05	9	3-27
JW52	5-60 ± 1	0.52 ± 0.05	9	3-27
JW60	5-60 ± 1	0.60 ± 0.05	9	3-27
JW78	5-60 ± 1	0.78 ± 0.05	9	3-27

SPECIFICATIONS 規格

DESCRIPTION 內容	SPECIFICATIONS 規格
MAXIMUM RESISTANCE VALUE 最大阻值	0.05 Ω
LEAD MATERIAL 綫徑材料	Tin coated copper wire
BODY MATERIAL 本體材料	Electrical grade, high performance molding compound
INSULATION RESISTANCE 絕緣電阻	Dry-10,000 M Ω ; Wet-100M Ω
DIELECTRIC WITHSTANDING VOLTAGE 耐電壓	Atmospheric-500V RMS, Reduced-325V RMS
INSULATION FLAMMABILITY 絕緣熔斷	Resistor insulation is self extinguishing within 10 seconds after externally applied flame is removed.
CURRENT RATING 正確額定	25 AMPS at 25°C derating to 0 am PS at 150°C